P-Series Pellet Stoves & Insert



arman P-Series stoves and inserts are a true testament to engineering excellence and heating performance. These customizable units create a striking statement in your living space, blending sharp lines and a mechanical flair with the elegant design of your home. Multiple sizes allow for seamless integration into any room, while efficiently heating spaces and adding an unexpected eye-catching element.



Features

- Quiet, variable-speed blower
- Cleaner glass thanks to exclusive air wash system
- · High efficiencies with accordion heat exchanger
- Room temperature regulated to within one degree
- Less maintenance with large ash pan
- Elegant flame-reactive mirrored glass
- · Installation made easy by direct vent
- EPA certified

Options

- Guard the floor with minimal coverage using the Harman Protect Cast Iron Hearth Pad (matte black only)
- Modern brushed stainless, brushed stainless leaf or bright nickel leaf trim
- Decorative deer slate, trail riders slate or deer brushed stainless ash door inlay options
- Matte black, or matte black with brushed stainless accent side heat shields
- Enjoy the look of a real log fire with the ceramic log set
- · Store an additional 60lb of fuel in the hopper extension for prolonged time between refueling
- Feed the fire with oxygen from outside the home using the outside air kit
- Direct vent wall pass-through



Ash door inlay options



Deer slate



Trail riders slate



Key Technologies More than 35 years of engineering excellence and heating performance, distilled into these exclusive technologies.



ESP Temperature Control Harman pellet stoves utilize an Exhaust Sensing Probe system (ESP) to deliver precise heat control. ESP constantly monitors and adjusts heat output to maintain set room temperatures within one degree.





PelletPro™ Technology This patented system makes it possible to burn any grade of pellet fuel with maximum heat and efficiency. A bottom-up feed system burns each pellet completely and allows for 24-hour heating.





Deer brushed stainless



P43 Pellet Stove

The P43 packs performance and engineering excellence into a small steel package. Use this alternative option to supplement your heat source, reduce home heating bills and embrace the power of the pellet. Intricate cast iron door styling and uncompromising construction offers a distinctive design statement in any room - while advanced technology is at work behind the scenes.

P43 shown standard



P61A Pellet Stove

The P61A is an efficient, pellet-burning machine. It is loaded with exclusive technologies to deliver powerful heat with an impressive, money-saving efficiency. A solid steel frame and traditional cast iron door styling provides a stoic look in any home. Make it your own with unique finishing and installation options.

P61A shown with brushed stainless leaf trim, brushed stainless air grille, and deer slate inlay





P68 Pellet Stove

The P68 harnesses the world-class engineering of Harman to deliver unmatched performance. This home heating powerhouse produces up to 71,200 BTUs — enough to fill the largest of spaces with warmth. Smart controls with hassle-free operation make this eco-friendly hearth an unmatched leader in pellet-heating technology.

P68 shown with modern brushed stainless trim, brushed stainless air grille, black side heat shields with brushed stainless accents, and trail riders slate inlay

P35i Pellet Insert

The P35i pellet insert delivers amazing efficiency in a compact design. Unique engineering, paired with world-class technology takes this eco-friendly heating option to the next level. Low emissions and 38,400 BTUs of even heat make it an ideal solution for smaller spaces. This direct vent insert can be installed without a chimney, and nearly anywhere in a home.

P35i shown with leaf brushed stainless trim and standard surround



An optional service rail kit makes it easy to install and perform maintenance.

P-Series Specifications and Clearances

P43 Pellet Stove

BTU/Hr Input¹...... 17,200-42,500

Efficiency²......78.0%

Heating Capacity³.....800-2,400 sq ft

Hopper Capacity......50lbs

Fuel Type.....Pellet

Venting Size.....3"


Clearance to Combustibles


Minimum Floor Protection

Standard.... ...25-7/16"W x 26-3/4"D


...36"W x 36"D4 Corner.....


P43: tested by OMNI: ASTM E1509-2004, ULC/ORD-C1482-M1990, (UM) 84-HUD, OAR 814-23-900 through 814-23-909, Mobile Home Approved





Standard Installation





Corner Installation

P68 Pellet Stove

BTU/Hr Input¹...... 15,800-71,200

Efficiency²......78.5%

Emissions......I.3g/hr


Heating Capacity³..... 1,500-3,900 sq ft

Hopper Capacity......76lbs

Fuel Type.....Pellet

Feed Rate......I.7-7.8lb/hr

Venting Size....

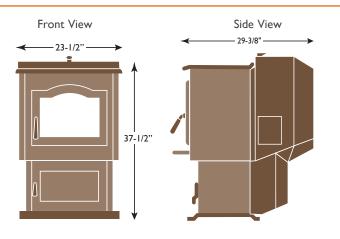

Standard Installation

Corner Installation


Clearance to Combustibles


Minimum Floor Protection

..25"W x 33"D Standard......

..36"W x 36"D4 Corner.....

P68: tested by OMNI: ASTM E1509-04, ULC C1482-M1990, ULC S627-00, OAR 814-23-900 through 814-23-909, Mobile Home Approved





Floor Protection: 36"W x 36"D

P61A Pellet Stove



BTU/Hr Input¹...... 14,200-60,300

Efficiency²......79.4%


Emissions......I.7g/hr

Heating Capacity³..... 1,300-3,500 sq ft

Hopper Capacity......72lbs

Fuel Type.....Pellet

Feed Rate......I.5-6.6lb/hr

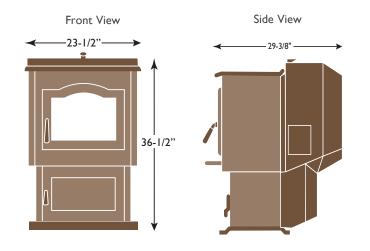

Clearance to Combustibles

Minimum Floor Protection


....25-1/8"W x 27-3/4"D Standard......

...36"W x 36"D4 Corner...

29-3/8" Floor Protection: 25-1/8"W x 27-3/4"D

Standard Installation

Corner Installation



P351 Pellet Stove

BTU/Hr Input¹...... 12,800-38,400

Efficiency²......78.0%

Emissions......1.5g/hr

Heating Capacity³.....800-2,100 sq ft Hopper Capacity......23-1/2"=62lbs; 19-1/2"=41-1/2lbs

Fuel Type.....Pellet

Feed Rate......I.4-4.2lb/hr

Venting Size.....4"

Clearance to Combustibles


Front hearth protection......6"


Surround Sizes

Standard......40"W x 31"H x 1-3/4"D

......46"W x 34"H x I-3/4"D

Zero Clearance Housing (optional) 24-3/4"H x 16-3/4"D

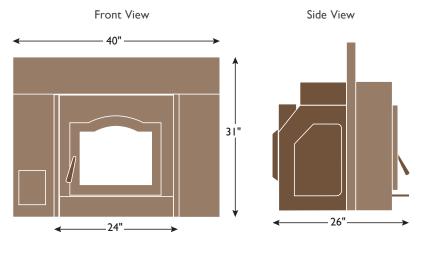



Minimum size hearth extension is $16"D \times 32"W$. P35i: tested by OMNI: ASTM E1509-04, ULC/ORD-C C1482-M1990, ULC-S628-93, Mobile Home Approved

P61A: tested by OMNI: ASTM E1509-04, ULC/ORD C1482-M1990, ULC S627-00, Mobile Home Approved

A Standard of Excellence

In 1979, Dane Harman used his welding skills and design talent to build his first wood stove, setting the stage for a journey full of entrepreneurial energy and innovation. Built to a Standard and Not a Price has remained an unwavering promise since that first model was handcrafted, and is exemplified today through Harman's multiple patents and industry awards. Harman heating solutions are built to withstand the test of time with reliable warmth and aesthetic elegance, staying true to Dane's dedication to optimal performance and engineering excellence.



YOUR HARMAN DEALER IS:



PHONE: 800-664-3119 WWW.HARMANSTOVES.COM





youtube.com/HarmanStoves

LIMITED LIFETIME WARRANTY⁵

The strongest in the industry, Harman provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

'EPA tested input 'Weighted Average LBV (Low Heating Yalve) Efficiency. 'See your local authorized Harman dealer for help in determining the product that best suit's your heating needs based on dimate and home efficiency. 'Minimum size corner hisrarhpad will not touch the wall. Wall to stove dearance are priority. 'For full warranty details, visit www.harmanstorec.com.

Actual product appearance, including flame, may differ from image. Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. Fuel density and pellet shape may affect hopper capacity. But imay vary depending on type of led usud. Refer to installation masual for complete clearance requirements and specifications. One of the state of the

HAR-1110U-0616